


FLEX NEON 0712 DOME 24V IP67




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0003LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	3000K	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0004LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	4000K	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0012LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	6000K	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0061LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	Rosso	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0106LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	Verde	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0105LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	Blu	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0107LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	Giallo	530~660LM/mt	3M VHB 5952	Epistar	IP67
AV0043LU-E	5000x7x12 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	Rosa	530~660LM/mt	3M VHB 5952	Epistar	IP67


**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 20mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

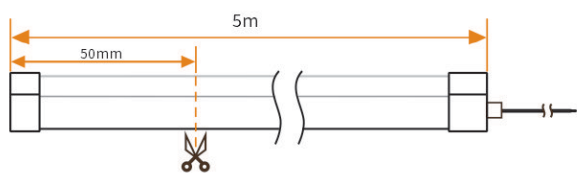

SIDE VIEW - FLESSIONE ORIZZONTALE
R < 60 mm



ACCESSORI:



Tappo con foro: AV0009LU-E
Tappo senza foro: AV0036LU-E



Profilo 2mt alluminio: AV0134GLD

