

COLORI

- 5500K
- 4000K
- 3000K
- 2700K
- Ambra
- Rossa
- Verde
- Blu

FINITURA

Flangia Inox 316L



CODICE: AV01077GN

IP67



Include:
Cavo 1,5mt SUB4 FROST-UV 2x0,75

Potenza: **WATT**
4W

220Lm
(3000K - 900mA)

Collegare in serie: **mA**
900mA

CRI
>80



220gr

OTTICA



3°


EMISSIONE LUMINOSA

0,5	0,03	E (0°) E (C0) 1,8°	36437 19032
1,0	0,06	E (0°) E (C0) 1,8°	9109 4758
1,5	0,09	E (0°) E (C0) 1,8°	4049 2115
2,0	0,13	E (0°) E (C0) 1,8°	2277 1189
2,5	0,16	E (0°) E (C0) 1,8°	1457 761
3,0	0,19	E (0°) E (C0) 1,8°	1012 529


Distanza (m) Diametro Cono (m) Illuminamento (lx)

— C0 - C180 (Angolo di dimezzamento: 3,6°)

DIMENSIONI

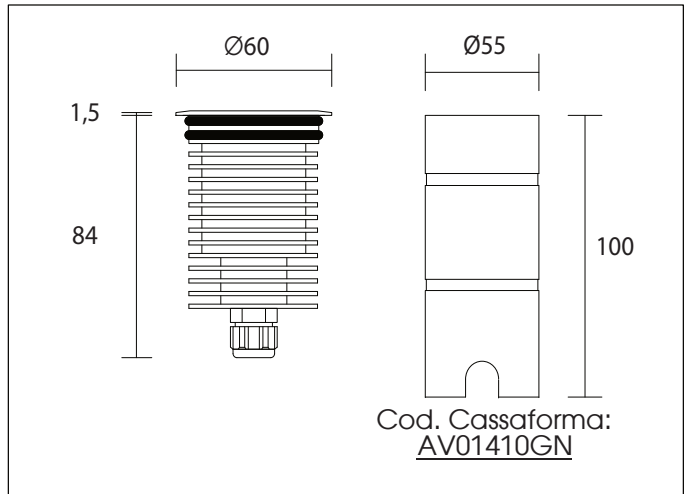

CONNESSIONI

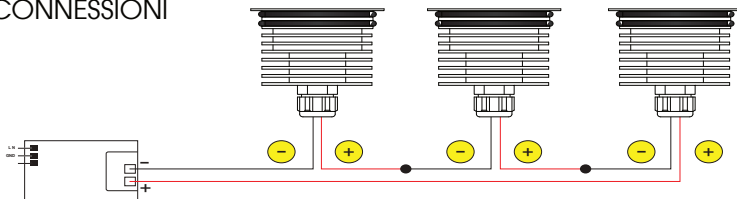

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.
Alimentare l'impianto solo dopo il collegamento di tutti i faretto.