

COLORI

- 5500K
- 4000K
- 3000K
- 2700K
- Ambra
- Rossa
- Verde
- Blu

FINITURA

Flangia Inox 316L



CODICE: AV01079GN

IP67



Include:
Cavo 1,5mt SUB4 FROST-UV 2x0,75

Potenza:
7W



770Lm
(3000K - 350mA)



Collegare in serie:
350mA



CRI
>80



400gr



OTTICHE



15° 25° 30°


EMISSIONE LUMINOSA

0,5	0,32	E (0°)	5939
		E (C0) 17,9°	2627
1,0	0,65	E (0°)	1485
		E (C0) 17,9°	657
1,5	0,97	E (0°)	660
		E (C0) 17,9°	292
2,0	1,3	E (0°)	371
		E (C0) 17,9°	164
2,5	1,6	E (0°)	238
		E (C0) 17,9°	105
3,0	1,9	E (0°)	165
		E (C0) 17,9°	73


Distanza (m) Diametro Cono (m) Illuminamento (lx)

— C0 - C180 (Angolo di dimezzamento: 35,8°)

DIMENSIONI

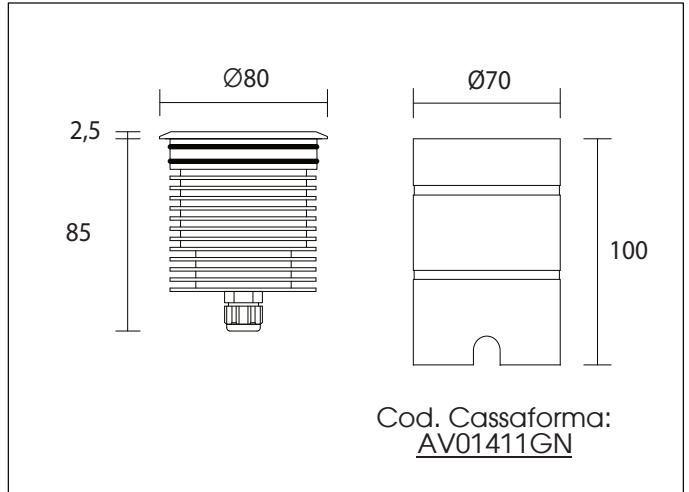

CONNESSIONI

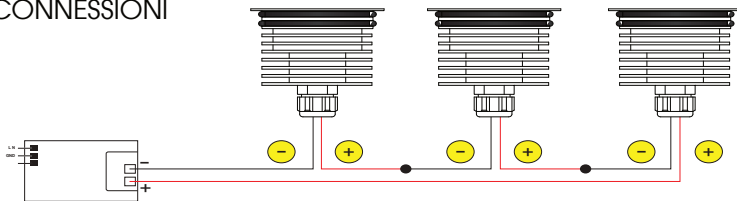

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.
Alimentare l'impianto solo dopo il collegamento di tutti i faretto.