

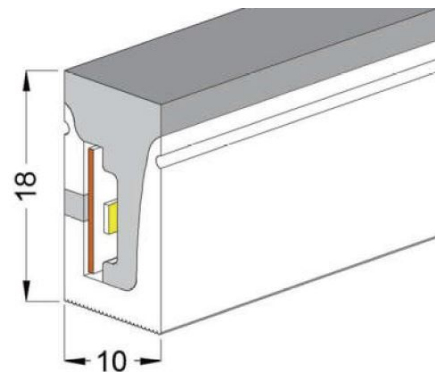

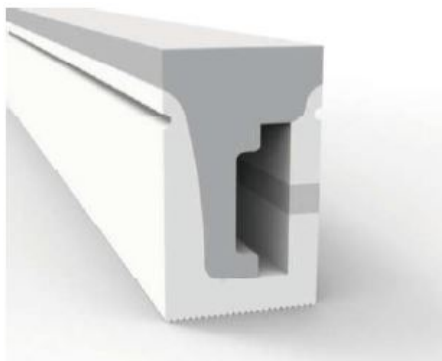


FLEX NEON 1018 FLAT 24V IP67




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0111LU-E	5000x10x18 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	3000K	380~500LM/mt	3M VHB 5952	Epistar	IP67
AV0112LU-E	5000x10x18 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	4000K	380~500LM/mt	3M VHB 5952	Epistar	IP67
AV0113LU-E	5000x10x18 mm	50mm	140	24VDC	3 Step	10W/mt	≥90	6000K	380~500LM/mt	3M VHB 5952	Epistar	IP67


**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 20mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

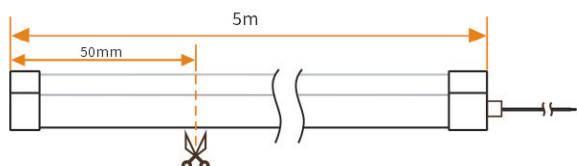

SIDE VIEW - FLESSIONE ORIZZONTALE
R < 60 mm



ACCESSORI:

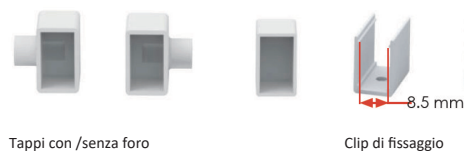

Tappi con /senza foro

Clip di fissaggio

