

COLORI	FINITURE
5000K	Verde Marmo
4000K	Grigio
3000K	Corten
2700K	

**3000K CRI>90 Su richiesta

OTTICA



DIFF.

CODICI

AV01477GN - L. 300 mm

AV01576GN - L. 600 mm

AV01577GN - L. 800 mm



IP67



Include:

Cavo 2mt SUB4 FROST-UV 2x0,50



Potenza:

6W



8900Lm

(3000K - 350mA)



Collegare in serie:

350mA



CRI

>80



800gr




EMISSIONE LUMINOSA

0,5	1,0	E (0°)	835
		E (C0)	46,2° 139
1,0	2,1	E (0°)	209
		E (C0)	46,2° 35
1,5	3,1	E (0°)	93
		E (C0)	46,2° 15
2,0	4,2	E (0°)	52
		E (C0)	46,2° 8,7
2,5	5,2	E (0°)	33
		E (C0)	46,2° 5,5
3,0	6,3	E (0°)	23
		E (C0)	46,2° 3,9


Distanza (m) Diametro Cono (m) Illuminamento (lx)

— C0 - C180 (Angolo di dimezzamento: 92,4°)

DIMENSIONI

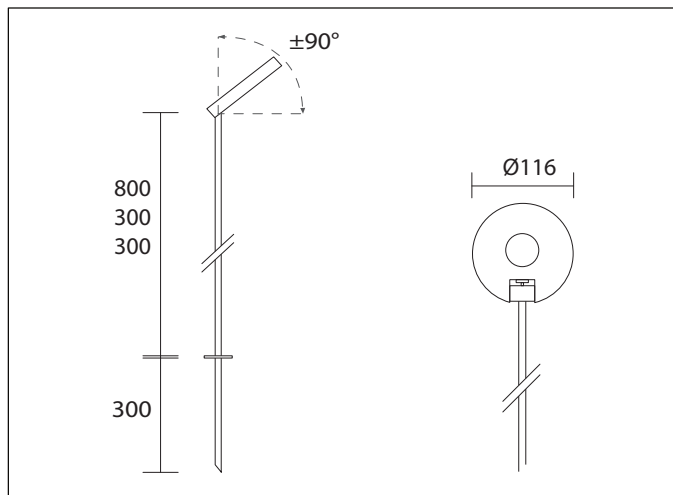

CONNESSIONI

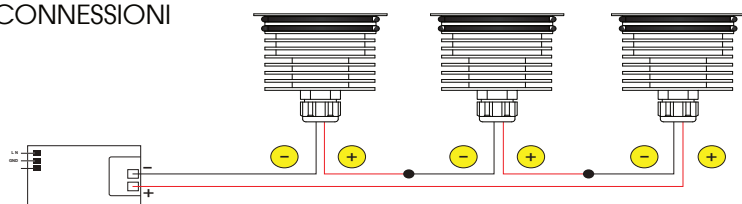

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.

Alimentare l'impianto solo dopo il collegamento di tutti i faretto.