

COLORI

5500K
4000K
3000K
2700K
Ambra
Rosso
Verde
Blu

FINITURE

Bianco 
Nero 

**3000K - CRI>90 Su richiesta

**Materiale: Alluminio anodizzato



CODICE: AV01597GN

IP67



Include:
Cavo 1,5mt SUB4 FROST-UV 2x0,50

Potenza: **WATT**
3W

190Lm
(3000K) **LUMEN**

Collegare in serie: **mA**
700mA

CRI
>80 **CRI**

Ø50mm

125gr

OTTICHE



10° 25° 40° 60° 110°




DIFF.


EMISSIONE LUMINOSA

0,5	0,20	E (0°) E (C0) 11,1°	3666 1733
1,0	0,39	E (0°) E (C0) 11,1°	916 433
1,5	0,59	E (0°) E (C0) 11,1°	407 193
2,0	0,78	E (0°) E (C0) 11,1°	229 108
2,5	0,98	E (0°) E (C0) 11,1°	147 69
3,0	1,2	E (0°) E (C0) 11,1°	102 48
Distanza (m)	Diametro Cono (m)	Illuminamento (lx)	
— C0 - C180 (Angolo di dimezzamento: 22,2°)			

DIMENSIONI

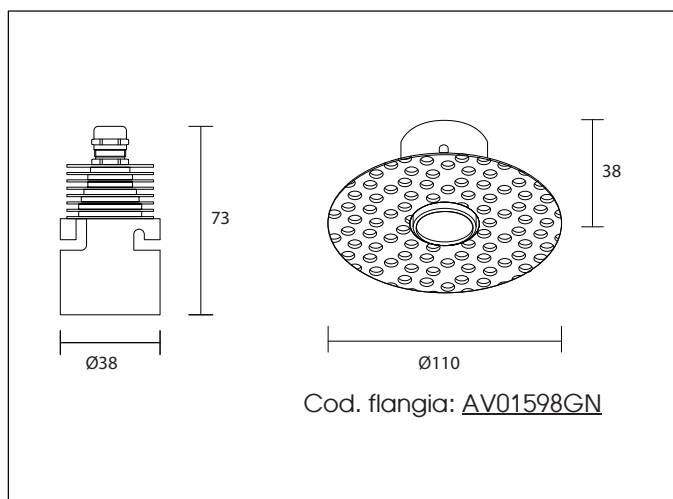

CONNESSIONI

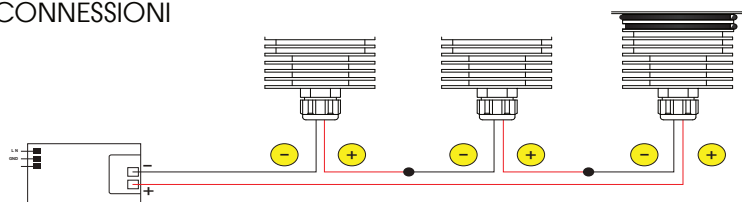

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.

Alimentare l'impianto solo dopo il collegamento di tutti i faretto.