

COLORI

- 5500K
- 4000K
- 3000K
- 2700K
- Ambra
- Rosso
- Verde
- Blu

**3000K CRI>90 Su richiesta

FINITURE

- Verde Marmo
- Grigio
- Nero

OTTICA



360°
Diff.

CODICI

- AV01440GN - L. 300/450/600mm.
- AV01447GN - L. 750/900/1200mm.
- AV01611GN - L. 1500mm.



IP67



Include:
Cavo 2mt SUB4 FROST-UV 2x0,50

Potenza:
3W



190Lm
(3000K - 700mA)



Collegare in serie:
700mA



CRI
>80




500gr




EMISSIONE LUMINOSA

0,5	573	E (0°) E (C0) 89,9°	40 0.0
1,0	1146	E (0°) E (C0) 89,9°	10 0.0
1,5	1719	E (0°) E (C0) 89,9°	4,4 0.0
2,0	2292	E (0°) E (C0) 89,9°	2,5 0.0
2,5	2865	E (0°) E (C0) 89,9°	1,6 0.0
3,0	3438	E (0°) E (C0) 89,9°	1,1 0.0
Distanza (m)		Diametro Cono (m)	
		Illuminamento (lx)	
— C0 - C180 (Angolo di dimezzamento: 179,8°)			

DIMENSIONI

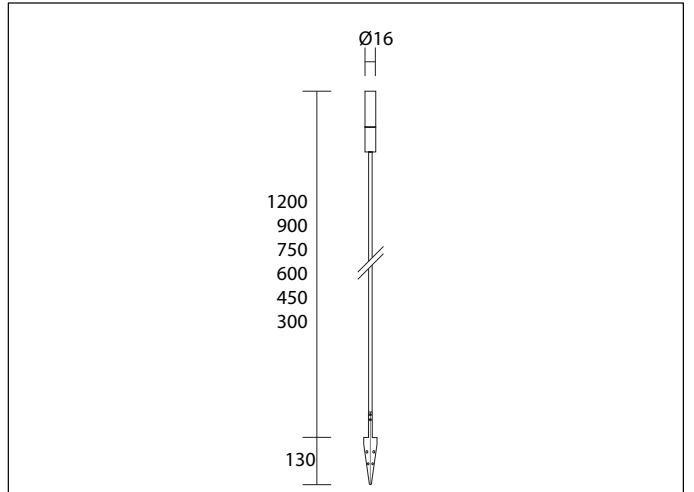

CONNESSIONI

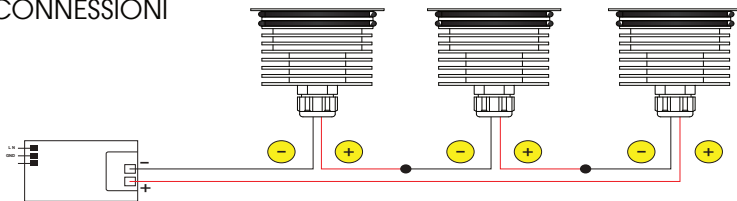

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.
Alimentare l'impianto solo dopo il collegamento di tutti i faretto.