

COLORI

- 5500K
- 4000K
- 3000K
- 2700K
- Ambra
- Rosso
- Verde
- Blu

FINITURE

- Verde Marmo
- Grigio
- Nero

**3000K CRI>90 Su richiesta

OTTICA



360°
Diff.

CODICI

AV01612GN - L. 300/500/650mm.

AV01613GN - L. 800/950/1250mm.

IP67



Include:
Cavo 2mt SUB4 FROST-UV 2x0,50

Potenza:
3W



190Lm
(3000K - 700mA)



Collegare in serie:
700mA



CRI
>80



500gr




EMISSIONE LUMINOSA

0,5	573	E (0°)	40
		E (C0) 89,9°	0.0
1,0	1146	E (0°)	10
		E (C0) 89,9°	0.0
1,5	1719	E (0°)	4,4
		E (C0) 89,9°	0.0
2,0	2292	E (0°)	2,5
		E (C0) 89,9°	0.0
2,5	2865	E (0°)	1,6
		E (C0) 89,9°	0.0
3,0	3438	E (0°)	1,1
		E (C0) 89,9°	0.0


Distanza (m) Diametro Cono (m) Illuminamento (lx)

— C0 - C180 (Angolo di dimezzamento: 179,8°)

DIMENSIONI

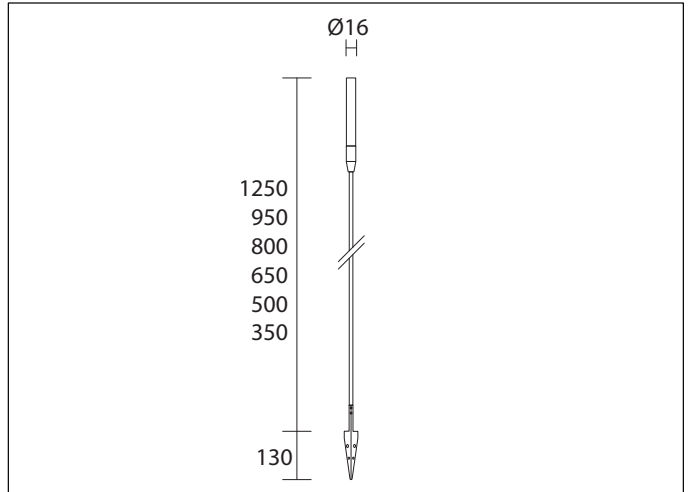

CONNESSIONI

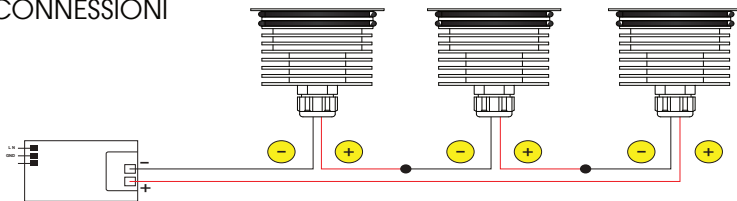

ATTENZIONE

I singoli faretto LED vanno collegati in serie, rispettando la polarità.

Alimentare l'impianto solo dopo il collegamento di tutti i faretto.