


FLEX NEON 0613 DOME 24V IP67 1 CUT




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0055LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	≥90	3000K	380LM/mt	3M VHB 5952	Epistar	IP67
AV0056LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	≥90	4000K	400LM/mt	3M VHB 5952	Epistar	IP67
AV0052LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	≥90	6000K	400LM/mt	3M VHB 5952	Epistar	IP67
AV0051LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	-	Blu	500LM/mt	3M VHB 5952	Epistar	IP67
AV0298LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	-	Rosso	510~670LM/mt	3M VHB 5952	Epistar	IP67
AV0299LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	-	Verde	510~670LM/mt	3M VHB 5952	Epistar	IP67
AV0280LU-E/1CUT	5000x6x13 mm	≈10mm	140	24VDC	3 Step	10W/mt	-	Rosa	510~670LM/mt	3M VHB 5952	Epistar	IP67

**Lunghezza Flex standard 5mt, lunghezza custom da 0,1 a 20mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

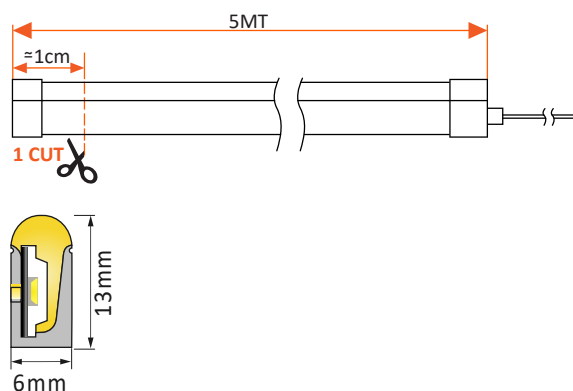

SIDE VIEW - FLESSIONE ORIZZONTALE
R < 30 mm

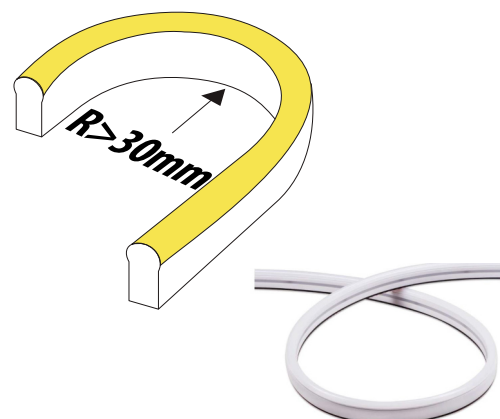

ACCESSORI:

