

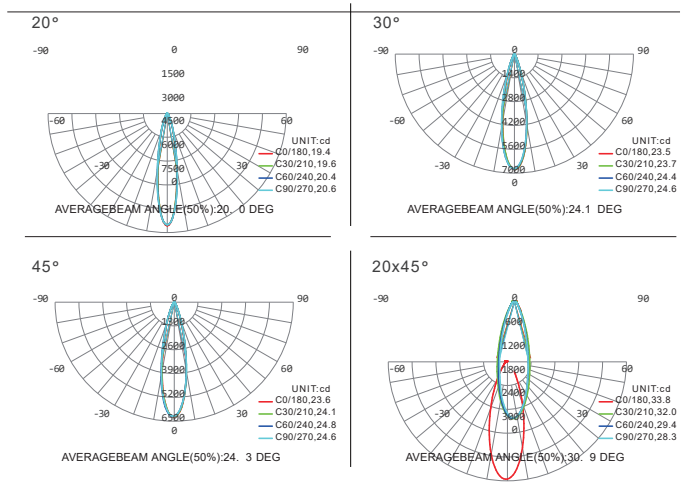





Optical light design Flexible and linear solutions for task lighting and wall washer application.
Beam angles of 15°,30°,45°,60°,25x45°,25x45x10° are available.
Multiple colors available in Static white, RGB,RGBW and DMX RGBW.
 Adjustable mounting clips with more possibility of light distribution.
 IP67 waterproof suitable for indoor and outdoor locations.

RGB Blue Cyan Green Yellow Red Magenta White

$$\text{RGB} + \text{Static white}$$

Optics PixelRGB + Static white



Light Technical Data								Voltage
Type	LED QTY	Model No.	CCT/Color	Beam Angle	Cut Length	Power	Lumen	Vdc
	LEDs/m				mm	W/m	lm/m	24V
Static white	24	-	2700K~6500K	15°, 30°, 45°, 60°, 20x45°, 20x45x10°	125	18	1355~1765	
								24V
	48	-	2700K~6500K	15°, 30°, 45°, 60°, 20x45°, 20x45x10°	62.5	24	1850~2355	
								24V
Tunable white	48	-	2700K+6500K	30°, 45°, 60°, 20x45°	125	24	1755~2270	
								24V
RGB	28	-	RGB	30°, 45°, 60°, 20x45°	250	19.2	535~680	
								24V
RGBW	28	-	RGBW	30°, 45°, 60°, 20x45°	250	24	840~1200	
								24V
PixelRGB	28	-	PixelRGB	30°, 45°, 60°, 20x45°	250	19.2	535~680	
								24V
PixelRGBW	28	-	PixelRGBW	30°, 45°, 60°, 20x45°	250	24	840~1200	
	