

Flex neon D8 IP65 360°




D8

360° | Ø8mm | Omni 360° | IP65




Electrical & Mechanical Technical Data

Bend	360°
Process	Tube
Finishing	Matt / Glossy
Diffuser shape	Omni 360°
IP Rating	IP65
Cable Entry	Top
Size	Ø8mm
Length	1m / 5m
CCT/Color Option	White
CRI	Ra80+, Ra90+, Ra95+
Power	10W/m
Voltage	24V DC
Dimming Protocol	PWM, TRIAC, 0-10V, DALI
Lifetime	30.000h
Photometric	360° beam angle
Bend Radius	R>30mm
Temperature	Tc max <75°C (167°F)
Operating Temp.	-25°C...+50°C (-13°F...122°F)
Weight	0.32kg (5000mm)
Mounting	/



Dimensions

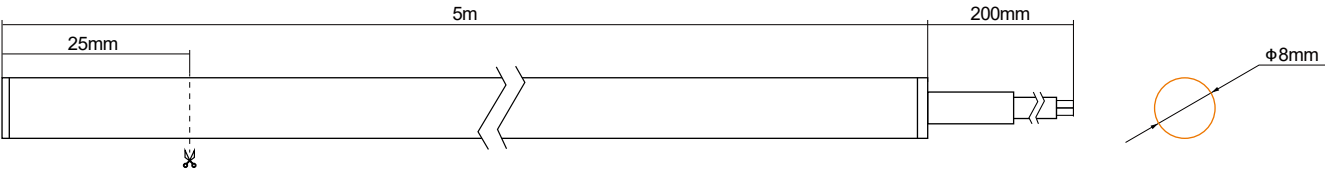

Light Technical Data

Type	Product Code	CCT/Color	CRI	Voltage	Cut Length	Eifficacy	Lumen
White Ra90+	AV0534LU-E	2500K	Ra90+	24VDC	25mm	55Lm/w	550Lm/m
	AV0535LU-E	3500K	Ra90+	24VDC	25mm	60Lm/w	600Lm/m
	AV0536LU-E	5000K	Ra90+	24VDC	25mm	62Lm/w	620Lm/m