




FLEX NEON 2014 CONVEX 14,4W/MT 24V

5 metri

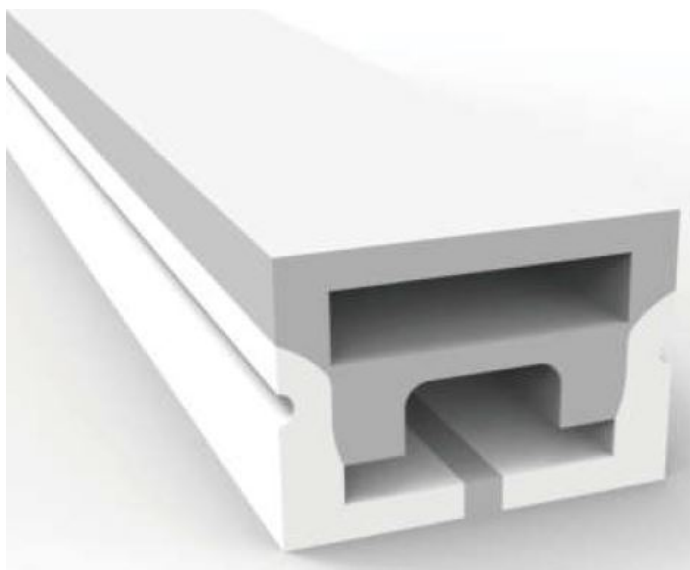

CODICE	PARAMETRI BASE					PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Larg. PCB	Chip	IP
AV0025LU-E	5000x20x14 mm	-	24VDC	3 Step	14,4W/m	≥80	3000K	580LM/m	12 mm	Epistar	IP65
AV1006LU-E	5000x20x14 mm	-	24VDC	3 Step	14,4W/m	≥80	2700K	580LM/m	12 mm	Epistar	IP65
AV0026LU-E	5000x20x14 mm	-	24VDC	3 Step	14,4W/m	≥80	4000K	580LM/m	12 mm	Epistar	IP65

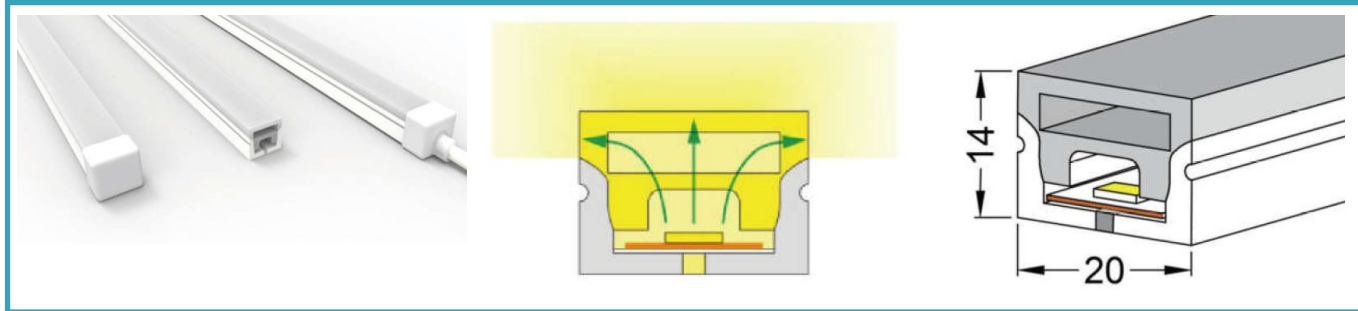


ACCESSORI



Tappo con foro



Tappo senza foro



Clip in alluminio



Profilo in alluminio



Profilo flessibile