

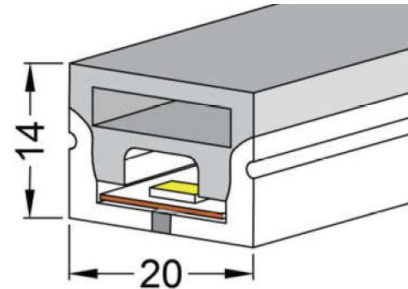

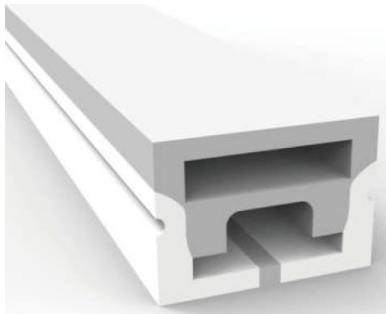


FLEX NEON 2014 CONVEX 24V IP67




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
5 METRI												
AV1006LU-E	5000x20x14 mm	50mm	140	24VDC	5 Step	15W/mt	≥80	2700K	825LM/mt	3M VHB 5952	Epistar	IP67
AV0025LU-E	5000x20x14 mm	50mm	140	24VDC	5 Step	15W/mt	≥80	3000K	825LM/mt	3M VHB 5952	Epistar	IP67
AV0026LU-E	5000x20x14 mm	50mm	140	24VDC	5 Step	15W/mt	≥80	4000K	825LM/mt	3M VHB 5952	Epistar	IP67
10 METRI												
AV0025LU-E /CST	10000x20x14 mm	50mm	140	24VDC	5 Step	15W/mt	≥80	3000K	825LM/mt	3M VHB 5952	Epistar	IP67
AV0026LU-E /CST	10000x20x14 mm	50mm	140	24VDC	5 Step	15W/mt	≥80	4000K	825LM/mt	3M VHB 5952	Epistar	IP67

**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 10mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

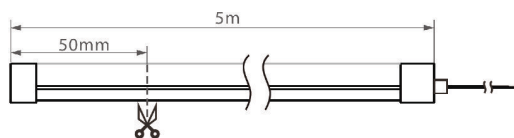

TOP VIEW - FLESSIONE VERTICALE
R<240 mm

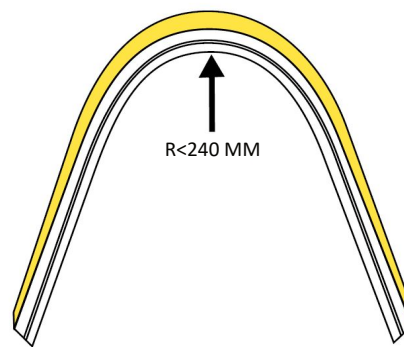

ACCESSORI:



Tappi con foro: AV0075LU-E
Tappo senza foro: AV0034LU-E



Clip di fissaggio: AV0071LU-E