

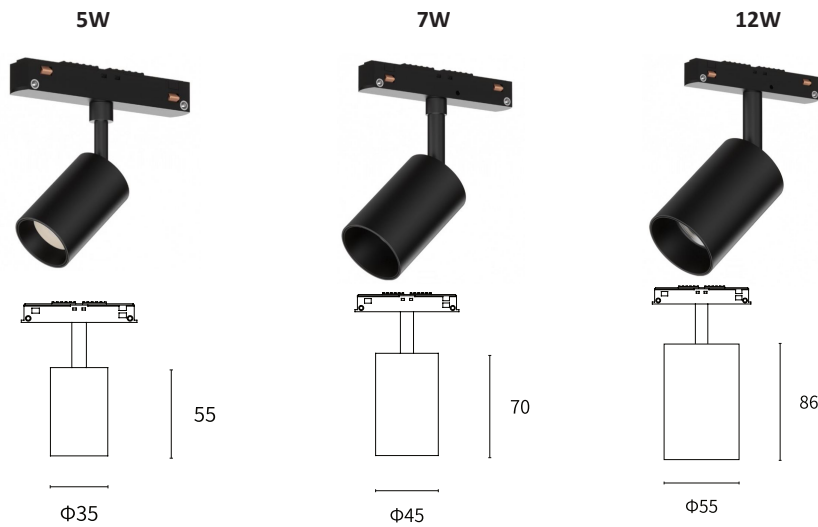


# FARETTO SPOT BINARIO 48V DIMMERABILE




CODICE	PARAMETRI BASE				PARAMETRI FOTOMETRICI					
	Misure	Watt	Input Volt	Tipo LED	CRI	UGR	Colore Luce	Lumen nominali	Rotazione	IP
AV6009WIAA	Ø35x55 mm	5W	48VDC	COB	≥90	<12	3000K	378LM	90° e 355°	IP20
AV6010NIAA	Ø35x55 mm	5W	48VDC	COB	≥90	<12	4000K	378LM	90° e 355°	IP20
AV6011WIAA	Ø45x70 mm	7W	48VDC	COB	≥90	<12	3000K	554LM	90° e 355°	IP20
AV6012NIAA	Ø45x70 mm	7W	48VDC	COB	≥90	<12	4000K	554LM	90° e 355°	IP20
AV6013WIAA	Ø55x86 mm	12W	48VDC	COB	≥90	<12	3000K	823LM	90° e 355°	IP20
AV6005NIAA	Ø55x86 mm	12W	48VDC	COB	≥90	<12	4000K	823LM	90° e 355°	IP20

## FOTOMETRIE:




FARETTO SPOT 5W - 24°

H(m)	E(lx)	D(cm)
1	1915	43
2	479	87
3	213	130
4	120	173
5	77	217



FARETTO SPOT 7W - 24°

H(m)	E(lx)	D(cm)
1	3714	35
2	929	70
3	413	105
4	232	141
5	149	176



FARETTO SPOT 12W - 24°

H(m)	E(lx)	D(cm)
1	4323	42
2	1081	84
3	480	126
4	270	169
5	173	211

## ACCESSORI:



Binario da incasso: AV6001XIAA



Binario superficie: AV6000XIAA

## IMMAGINI:

