






30-01

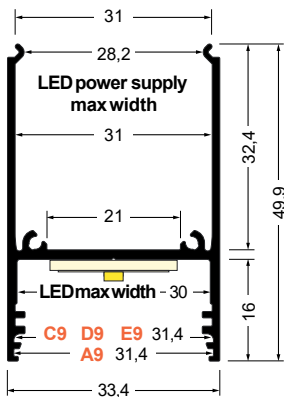

30-02




30-03






230-240 V AC
50-60 Hz
power supply

30-0203
holder

30-0203
Holder

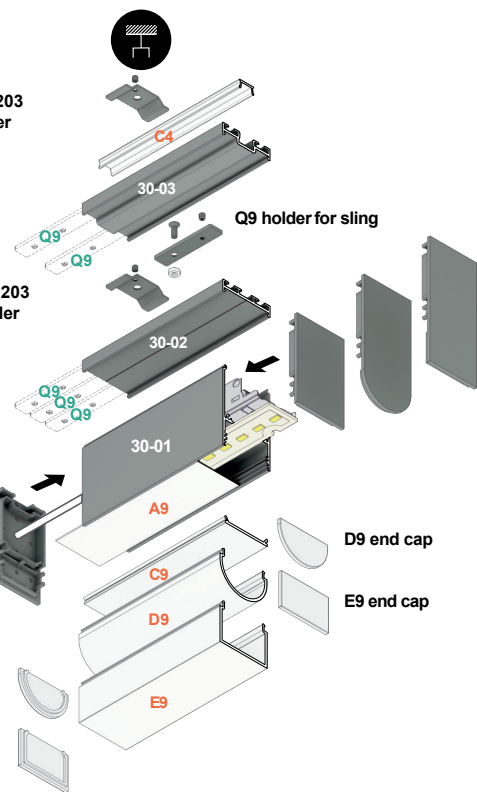


A 30-01 + 30-02





sling for LED
mounting

30-02

30-01




B 30-01 + 30-03

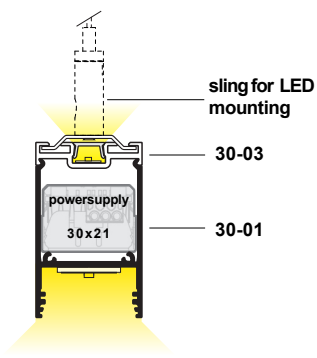



sling for LED
mounting


30-03




30-01




Mounting must be performed by an appropriately
qualified person.
Mounting must be performed with the 230 V power
supply disconnected

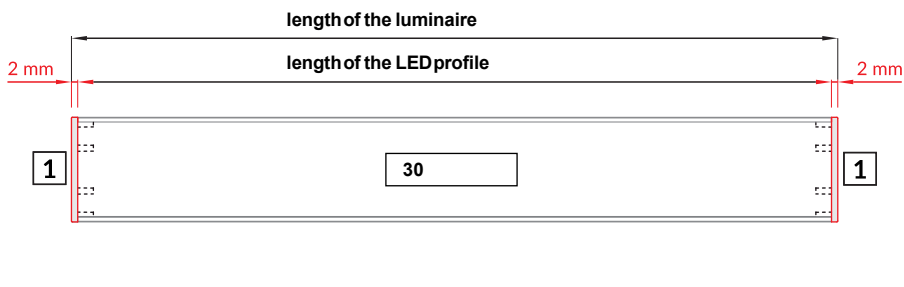

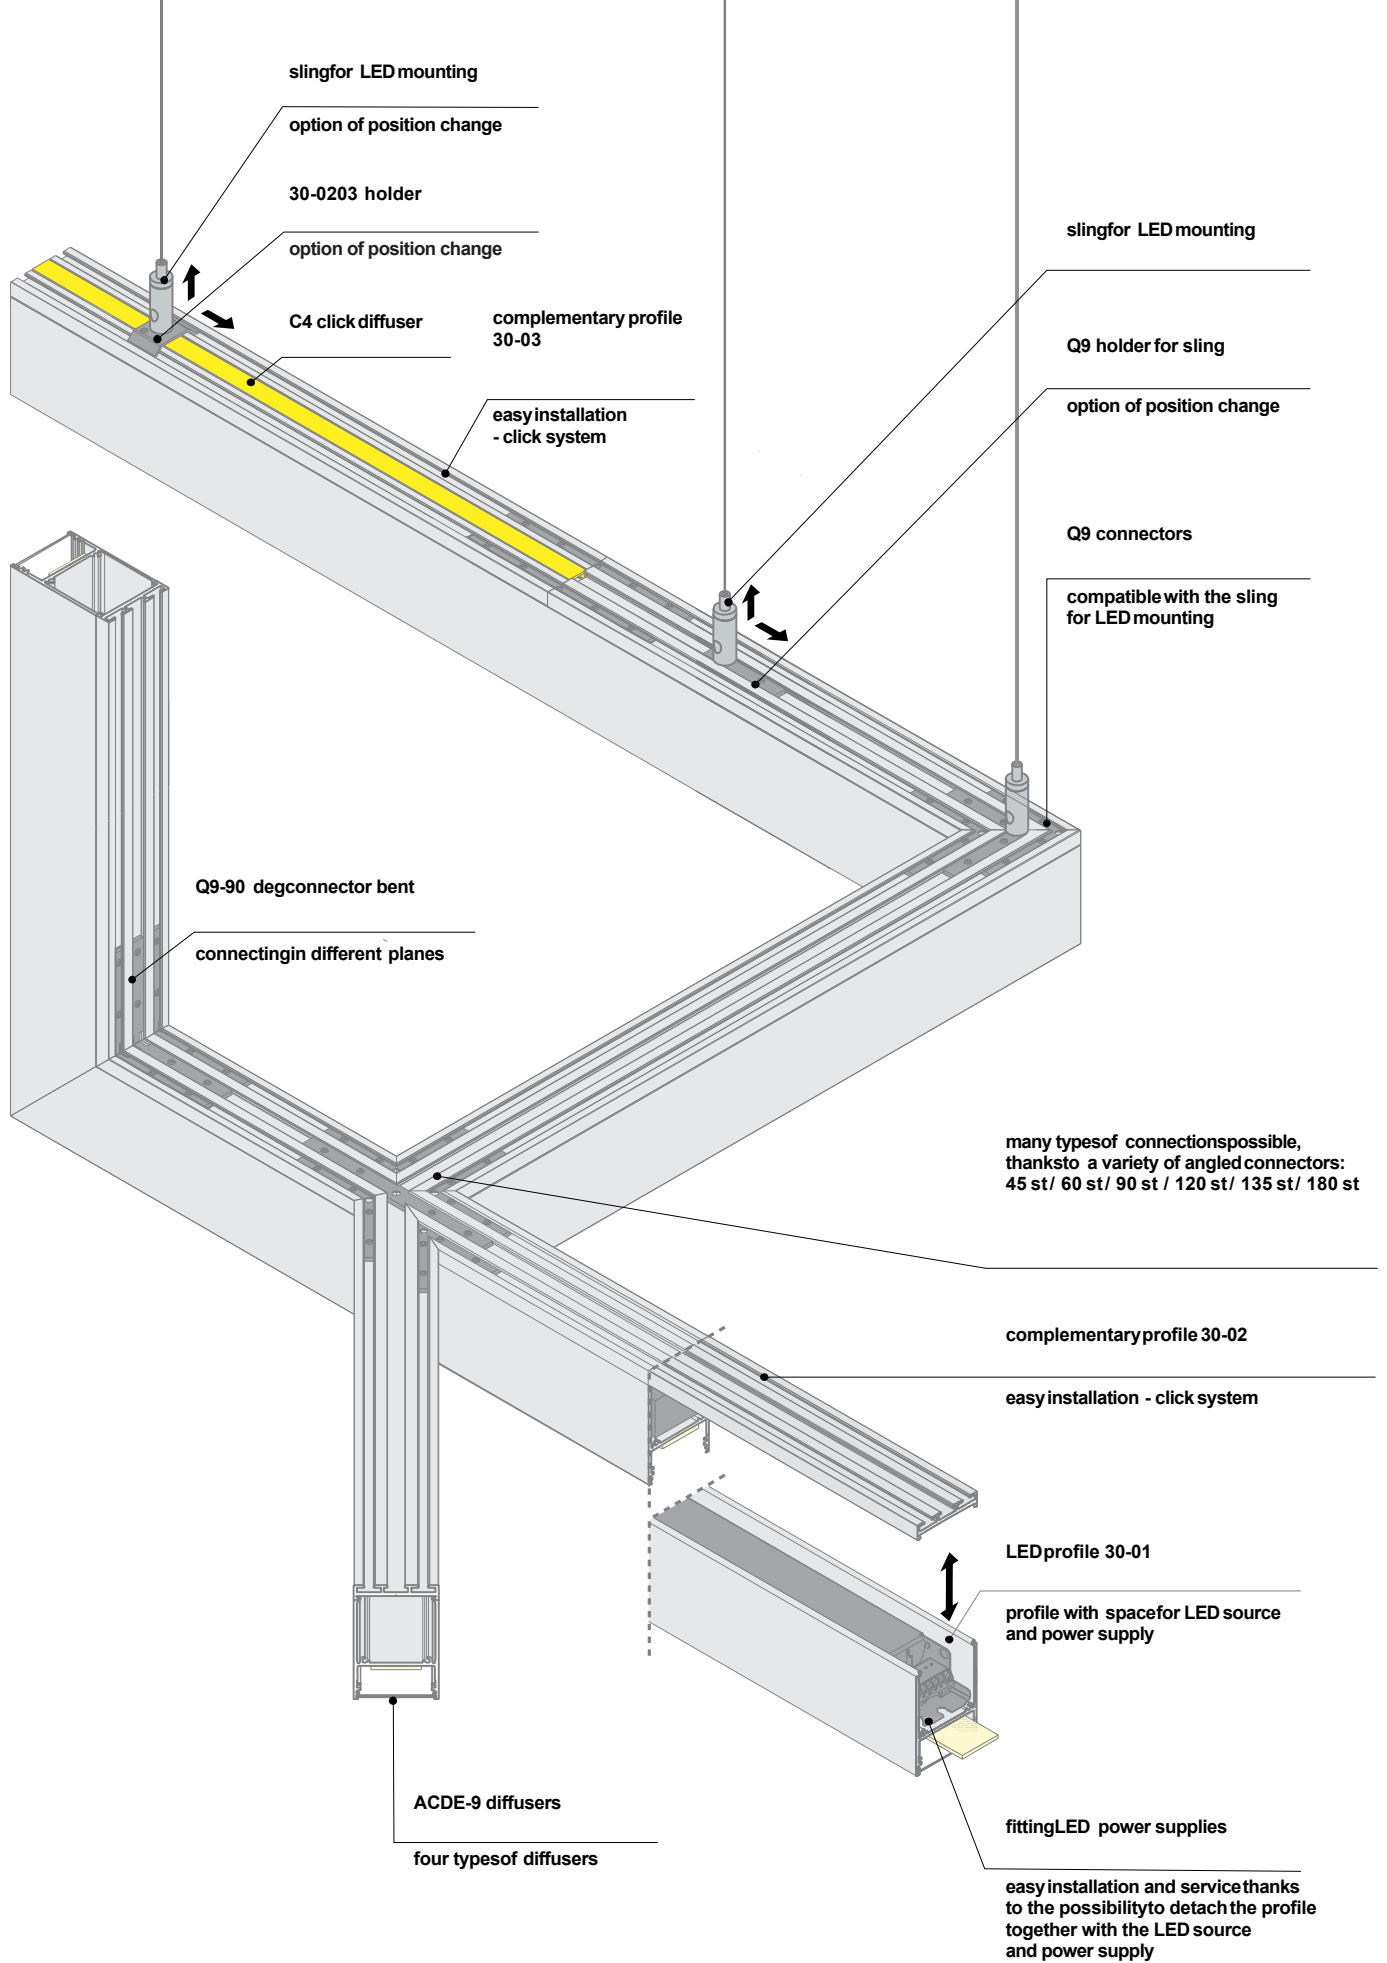

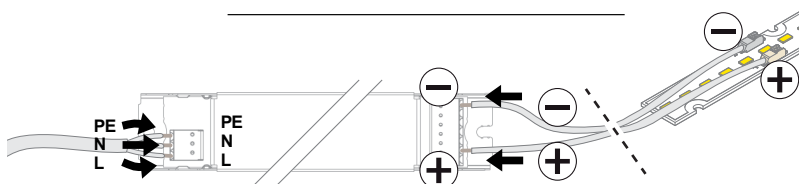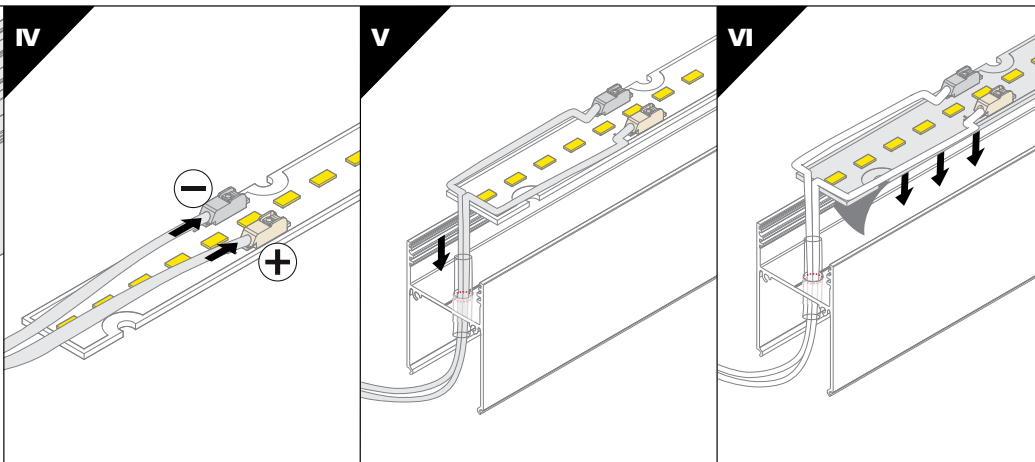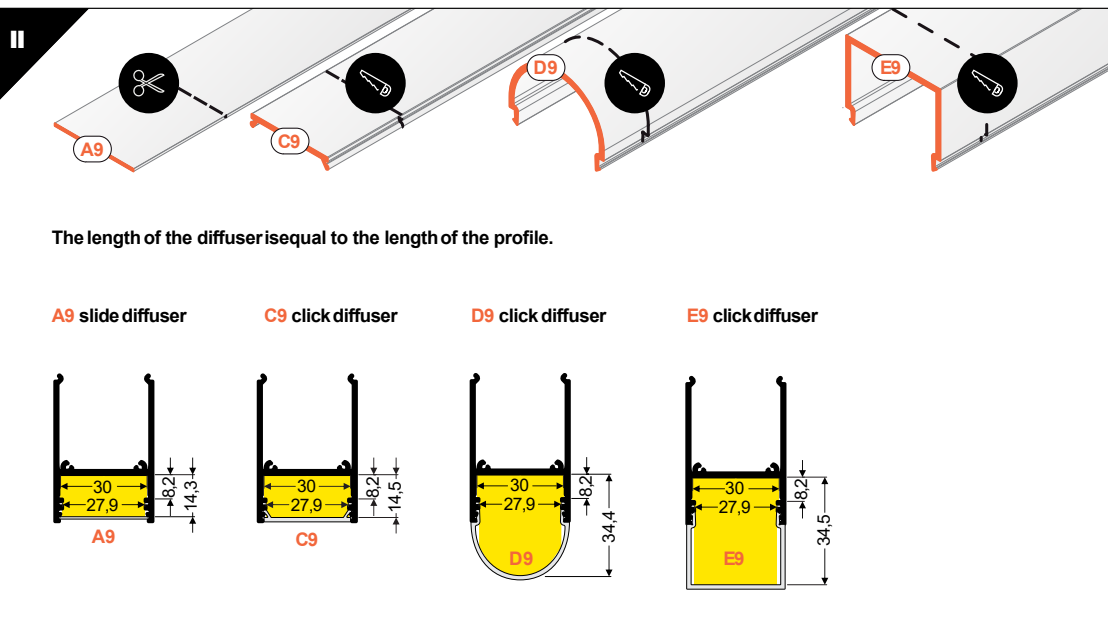


VIII

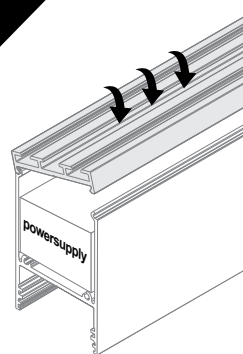


IX


A9 slide diffuser

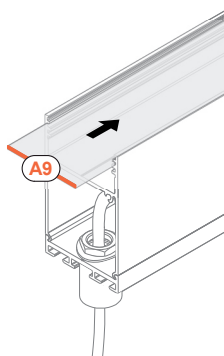


C9 click diffuser

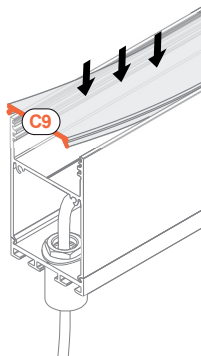

D9 click diffuser

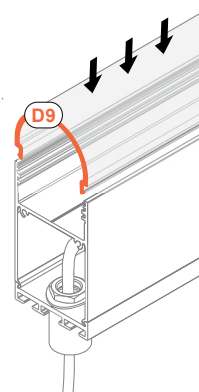

E9 click diffuser

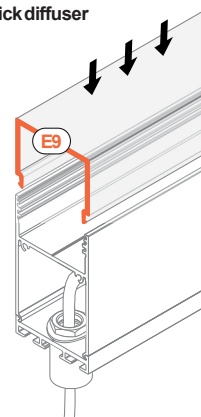

X




MOUNTING A SLING TO THE LED MOUNTING TO THE LUMINAIRE

30-0203 holder

Q9 holder for a sling

Q9-180 degconnector

screw for Q9 connector

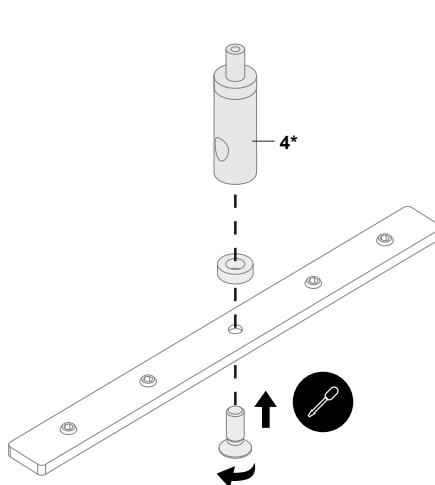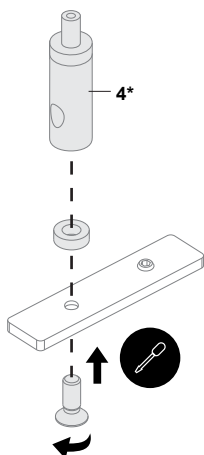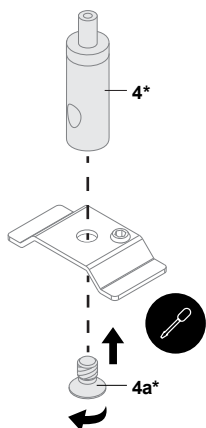

* MORE DETAILS:
manual sling for mounting



In case of mounting even long lighting fixtures, a set (two slings) is enough. However, it is recommended to use an additional sling to increase stabilization.




XI

30-0203 holder

Q9 holder for a sling

Q9-180 degconnector

screw for Q9 connector

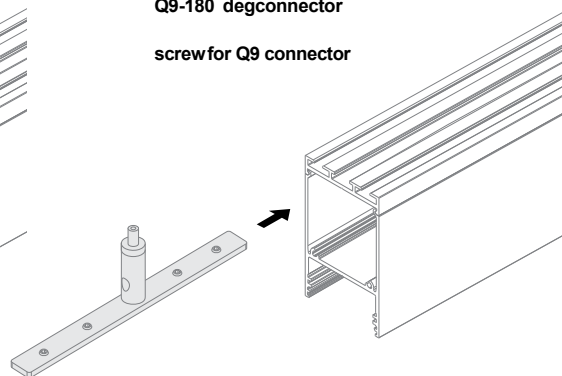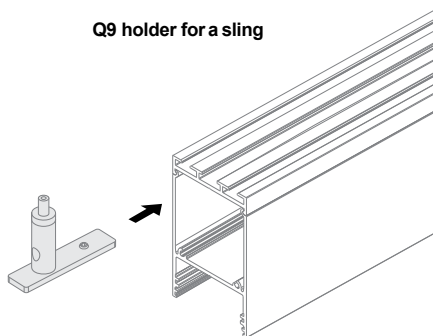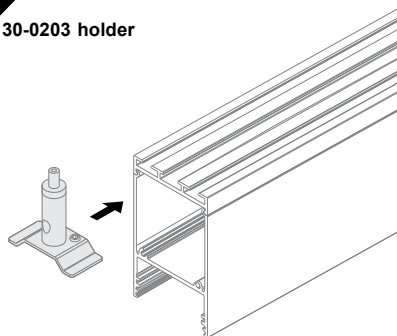





XII


A9 slide diffuser

C9 click diffuser




D9 click diffuser

E9 click diffuser




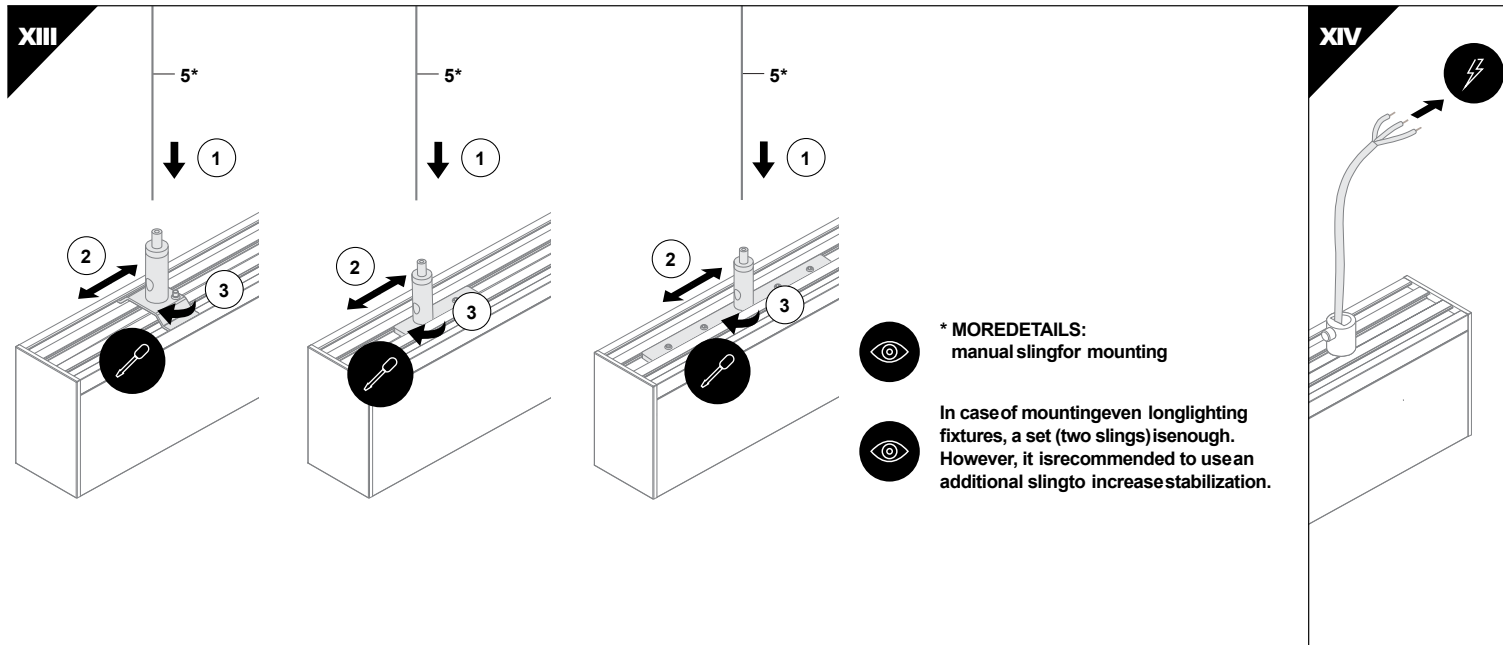

B 30-01 + 30-03

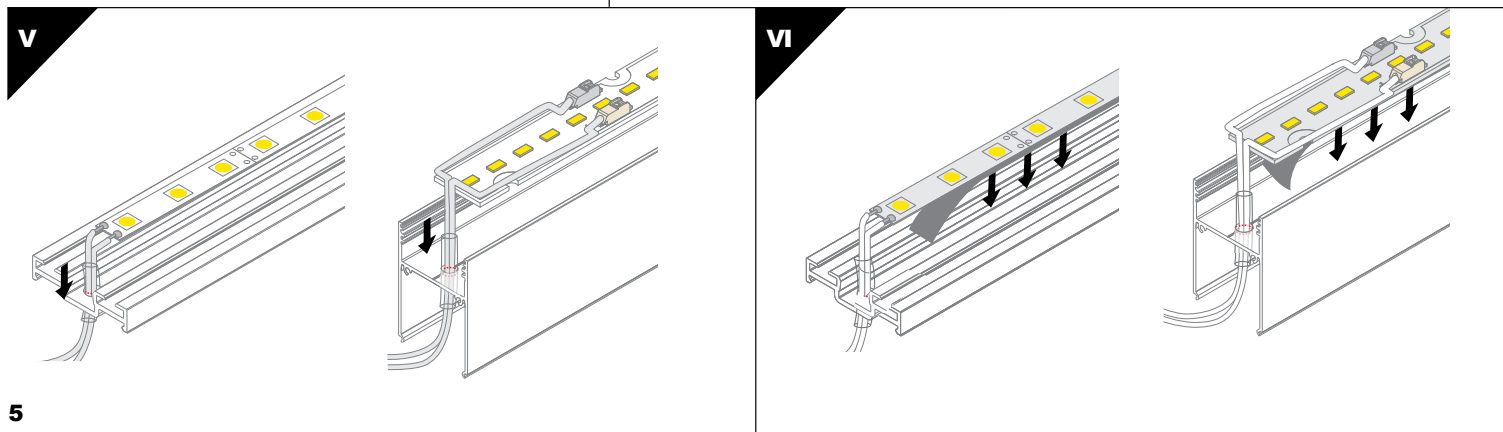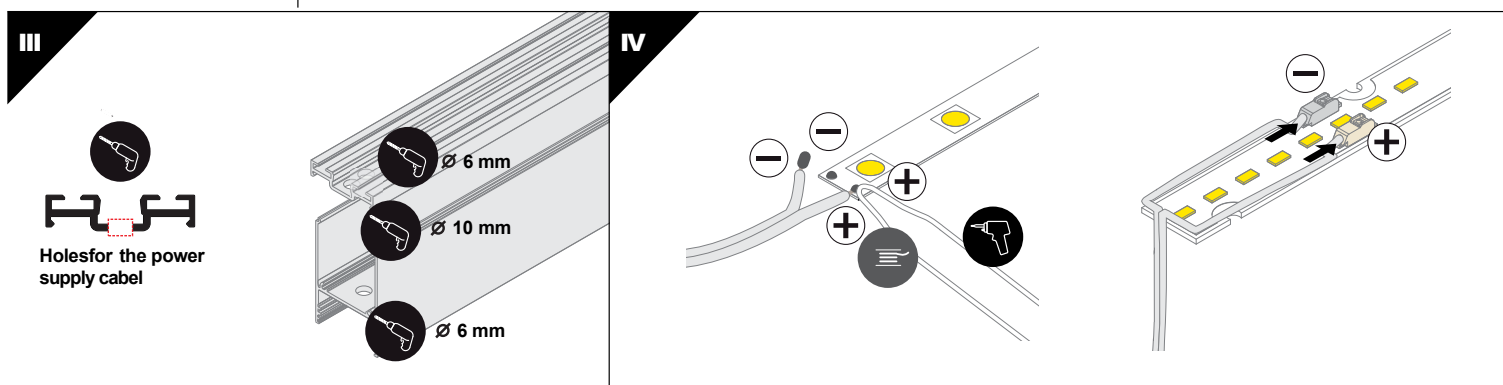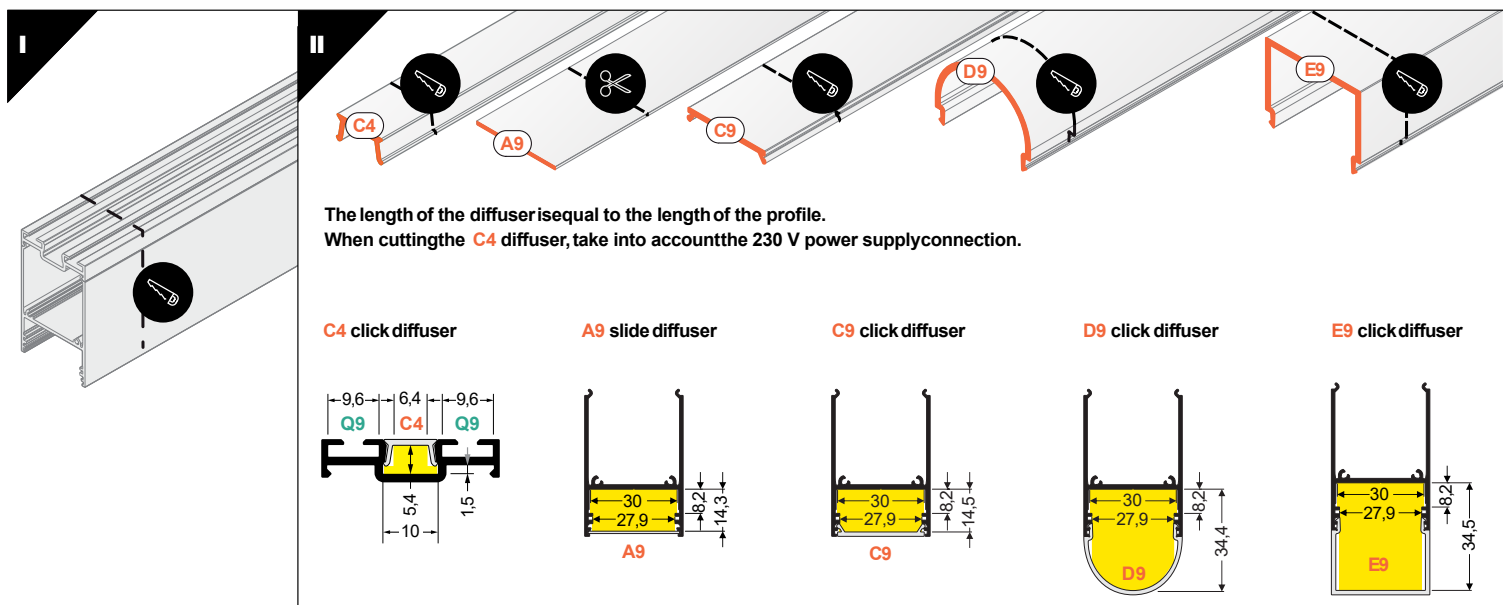


VII

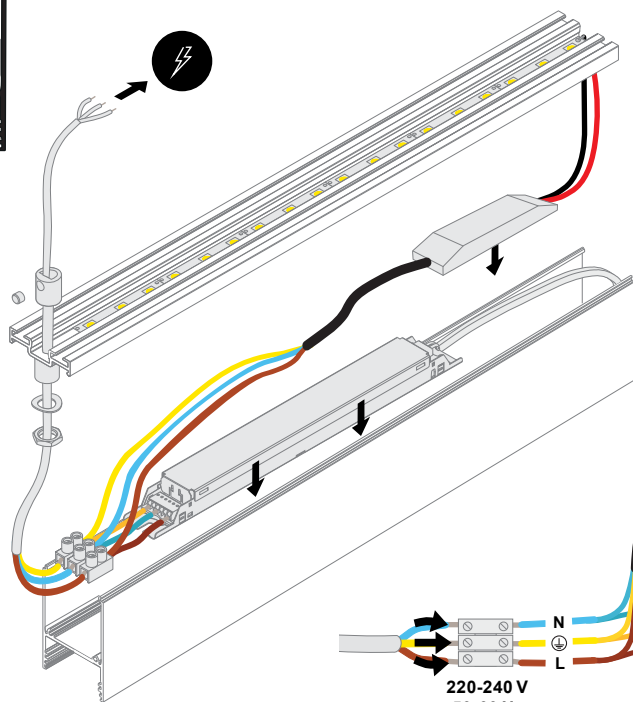

ELECTRICAL CONNECTION LAYOUT

power supply for LED strip



100-240 V AC
50-60 Hz

12-24 V


power supply for LED module



100-240 V AC
50-60 Hz


12-24 V

VIII




IX


C4 click diffuser




A9 slide diffuser




C9 click diffuser

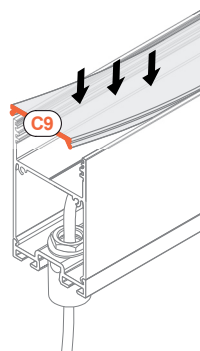

D9 click diffuser

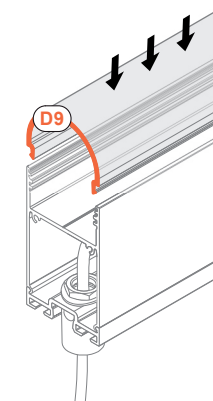


E9 click diffuser

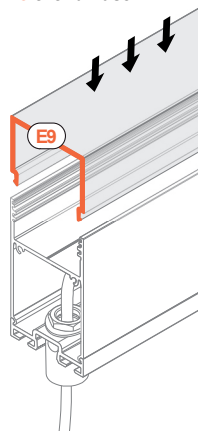

X

MOUNTING A SLING TO THE LED MOUNTING TO THE LUMINAIRE /

30-0203 holder

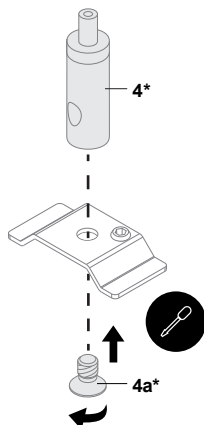


* MORE DETAILS:
manual sling for mounting




In case of mounting even long lighting fixtures, a set (two slings) is enough. However, it is recommended to use an additional sling to increase stabilization.

XI

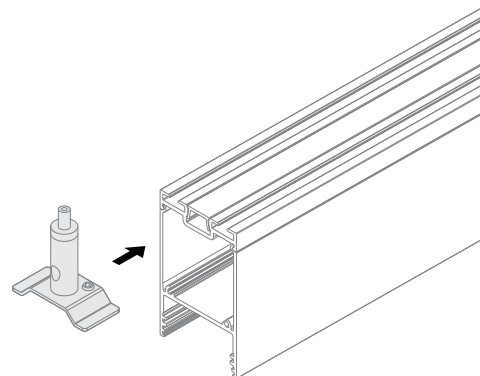


XII


A9 slide diffuser

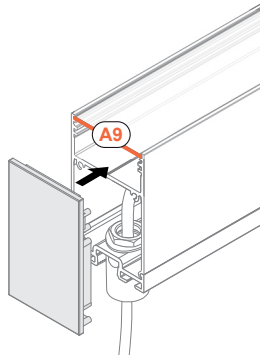


C9 click diffuser

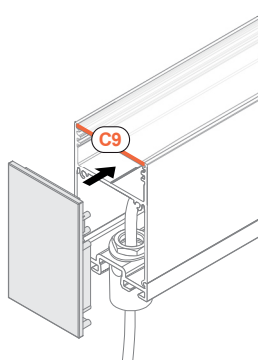


D9 click diffuser

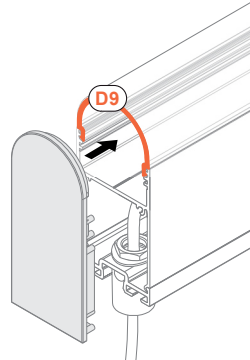

E9 click diffuser

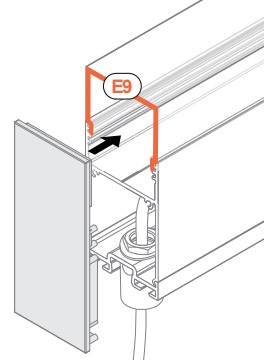

XII

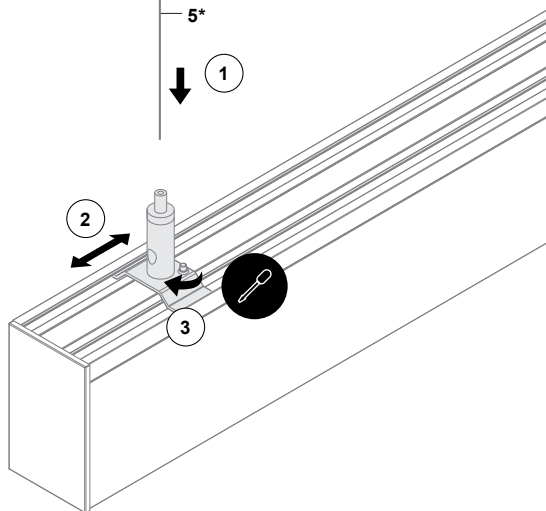


* MOREDETAILS:
manual slingfor mounting







In case of mountingeven longlighting
fixtures, a set (two slings) isenough.
However, it isrecommended to usean
additional slingto increasestabilization.

XIII

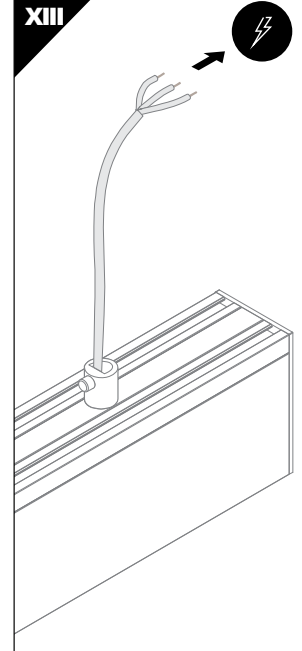

MOUNTINGQ9 CONNECTORS- ANGLEDCONNECTIONS

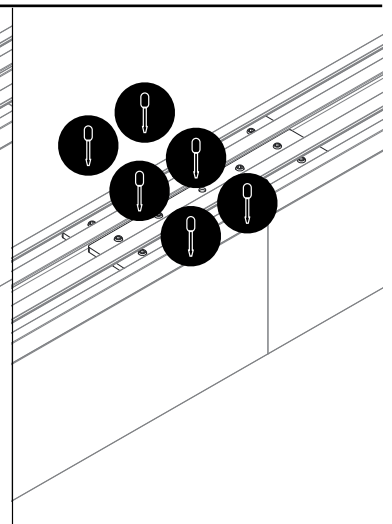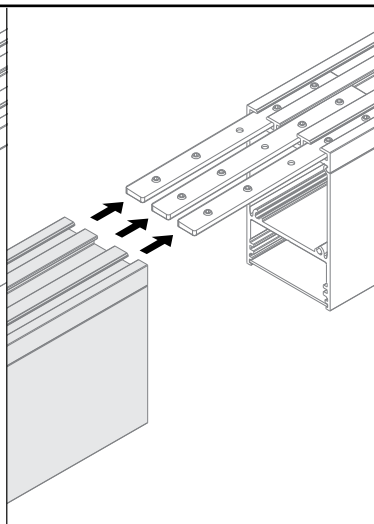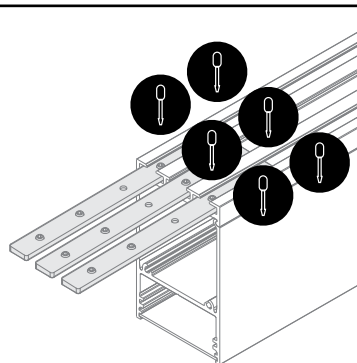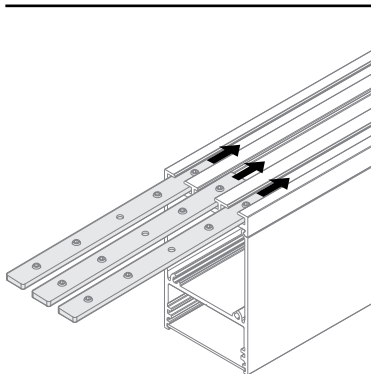

A 30-01 + 30-02

B 30-01 + 30-03

many typesof connectionspossible, thanks to a variety of angled connectors:
45 deg/ 60 deg/ 90 deg/ 120 deg/ 135 deg/ 180 deg

t