


LAMPADA A SOSPENSIONE CILINDRO CORTO DIMMERABILE

Per binario 48V

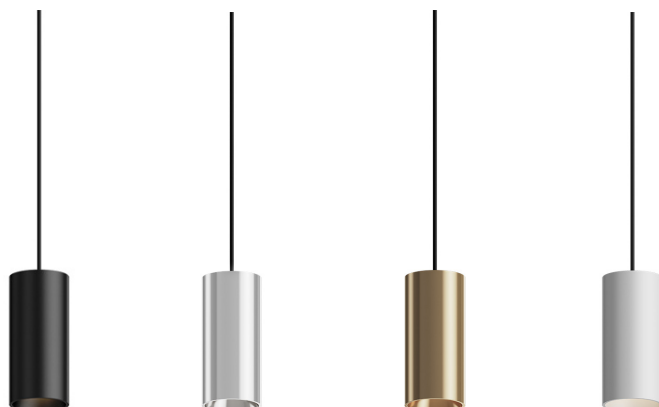

7W **WATT**

48V **V**


36° **OTTICA**

CRI >90 **CRI**

UGR <12 **UGR**

CODICE	MISURE	INPUT VOLT	WATT NOMINALI	CRI	FINITURA	COLORE LUCE	LUMEN NOMINALI	ERP ECODSIGN	IP
AV7505WIAA	Ø45x100mm Cavo 1500mm	48V	7W	≥90	Nero	3000K	493LM	-	IP20
AV7506WIAA	Ø45x100mm Cavo 1500mm	48V	7W	≥90	Bianco	3000K	493LM	-	IP20
AV7507WIAA	Ø45x100mm Cavo 1500mm	48V	7W	≥90	Cromo	3000K	493LM	-	IP20
AV7509WIAA	Ø45x100mm Cavo 1500mm	48V	7W	≥90	Oro	3000K	493LM	-	IP20

Dimensioni

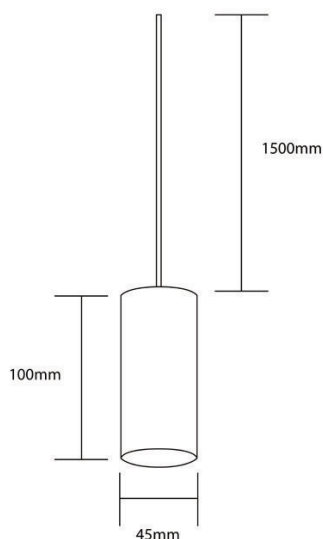


Binari compatibili




Binario incasso

AV6001XIAA nero
AV6627XIAA bianco



Binario a superficie

AV6000XIAA nero
AV6626XIAA bianco



Binario MINI a superficie

AV7145XIAA nero
AV7146XIAA