


STRIP LED 2835 9,6W/MT

5 metri



CRI 95+ 24V CRI>95



12V 24V


OTTICA

120°


1000-960 Lm/mt

≥90 CRI

CRI 90+ 24V CRI>90

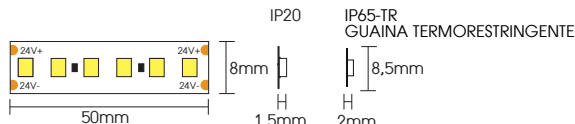

CRI 90+ 12V CRI>90



CODICE	PARAMETRI BASE					PARAMETRI FOTOMETRICI					
	Misure	Unità di taglio	Input Volt	Watt nominali	Watt effettivi	CRI	Colore Luce	Lumen nominali	LED/m	Classe Erp EcoDesign	IP
24V CRI>95											
AV5879CIAA	5000x10x2mm	7LED/35,7mm	24VDC	9,6W/m	-	≥95	6000K	1000LM/m	196LED/m	F	IP20
AV5880NIAA	5000x10x2mm	7LED/35,7mm	24VDC	9,6W/m	-	≥95	4000K	1000LM/m	196LED/m	F	IP20
AV8592WIAA	5000x10x2mm	7LED/35,7mm	24VDC	9,6W/m	-	≥95	3500K	1000LM/m	196LED/m	F	IP20
AV5881WIAA	5000x10x2mm	7LED/35,7mm	24VDC	9,6W/m	-	≥95	3000K	1000LM/m	196LED/m	F	IP20
AV5882WIAA	5000x10x2mm	7LED/35,7mm	24VDC	9,6W/m	-	≥95	2700K	1000LM/m	196LED/m	F	IP20
24V CRI>90											
AV5378CIAA	5000x8x1.5mm	6LED/50mm	24VDC	9,6W/m	-	≥90	6000K	960LM/m	120LED/m	G	IP20
AV5346NLU-E	5000x8x1.5mm	6LED/50mm	24VDC	9,6W/m	-	≥90	4000K	960LM/m	120LED/m	F	IP20
AV5345WIAA	5000x8x1.5mm	6LED/50mm	24VDC	9,6W/m	-	≥90	3000K	960LM/m	120LED/m	G	IP20
AV5908CIAA	5000x8,5x2mm	6LED/50mm	24VDC	9,6W/m	-	≥90	6000K	960LM/m	120LED/m	G	IP65-TR
AV5909NIAA	5000x8,5x2mm	6LED/50mm	24VDC	9,6W/m	-	≥90	4000K	960LM/m	120LED/m	G	IP65-TR
AV5910WIAA	5000x8,5x2mm	6LED/50mm	24VDC	9,6W/m	-	≥90	3000K	960LM/m	120LED/m	G	IP65-TR
12V CRI>90											
AV5551CIAA	5000x8x1.5mm	3LED/25mm	12VDC	9,6W/m	-	≥90	6000K	960LM/m	120LED/m	G	IP20
AV5550NIAA	5000x8x1.5mm	3LED/25mm	12VDC	9,6W/m	-	≥90	4000K	960LM/m	120LED/m	G	IP20
AV5549WIAA	5000x8x1.5mm	3LED/25mm	12VDC	9,6W/m	-	≥90	3000K	960LM/m	120LED/m	G	IP20